

# TECHNICAL DATASHEET

## SHELLAC (SCHELLACK)

Selder & Company AB 4.3.2021

[www.selder.com/en](http://www.selder.com/en)

Shellac is used prior to painting on wood to seal knots and resin pockets, and to prevent discoloration of the painted surface.



**Work manual:** Pour a small quantity at a time into a container for one-time use. Use a simple brush – containers and brushes cannot be washed afterwards. Apply evenly.


**Contains:** 99,5 % strong isopropanol alcohol, shellac flakes.

**Drying time:** 1/2–1 hour.

**Packaging:** 0,25 litre cans

**Warning:** Extremely flammable. Do not expose to heat, sparks, open flame or hot surfaces. Do not smoke in the vicinity.

Visit our website [www.selder.com/en](http://www.selder.com/en) for more information.

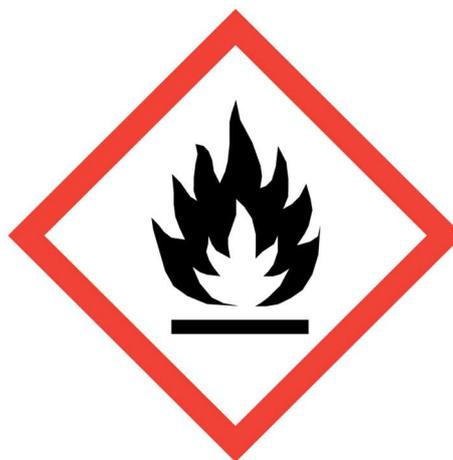

Extremely flammable liquid.  
Must not be exposed to heat/sparks/open fire/warm surfaces.  
Smoking prohibited.

Selder & Company AB  
Knivstagatan 11  
75323 Uppsala, Sweden  
atle@selder.com  
+46 73 0700 384

